




Light distribution

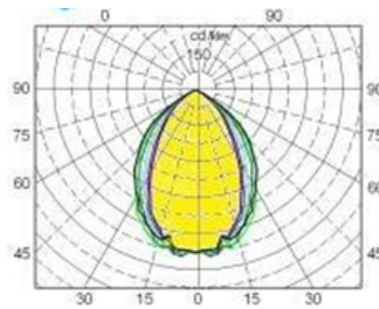

LATONAO1200S84061000

LATONA is a budget friendly solution specifically designed for public areas where a soft light distribution is required.

LATONA's design allows clean and even light distribution, at a budget friendly cost.

Features

- long life-span
- easy mounting
- comfort and uniformity of the light output

Application

With its protection of IP44 LATONA is the perfect solution for production facilities, warehouses, corridors, parking spaces, underground passages, metro-stations, etc..

Mounting

LATONA is available for surface mounting.

Accessories

SPECIFICATION

General information

Mounting	Surface
Accessories	Housing: Optic:
Dimensions	1184x128x60mm
Light source replaceable	Yes
Driver included	Yes
Beam angle	Wide Flood: 120°
Emergency light	Yes, upon request
Sensor	Upon request
Weight	
Warranty	5 years
Accessories	n/a

Electrical data

Connected wattage (W)	43
Control Interface	ON/OFF, DALI / PUSH
Input Voltage/Frequency	220-240 V, 50-60 Hz
Protection class IEC	I
Connection	3P

Luminous flux tolerance +/-10%
 Power consumption tolerance +/-10%

Lighting technology

Luminaire luminous flux (lm)	5000/ 6100/ 6700/ 7400
Luminous Efficacy	141lm/W
Correlated Color Temperature	CRI>80
Color rendering index (CRI)	Yes
Service life	L80B20 >80.000h
Light distribution	Direct
Adjustability	N/A
Unified glare rating CEN	<21
Initial Chromaticity	MacAdam 3

Safety

Ingress protection code	IP44
Mech. impact protection code	IK05
Max. ambient temperature	0 to +35 °C
Approval marks	CE, RoHS
Photobiological risk	RG0
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	Mounting on normally flammable surfaces